

LAND CORNER RECORD


Index: L9	Corner: 1/4 corner common to sections 16 & 17	State of Indiana - Hoosier National Forest		
Section: 16	Township: 7N	Range: 1E	P.M.: 2nd	County: Monroe
Coordinate:	Lat./N:	Lon./E:	Datum:	


CORNER HISTORY: (Chronological history of corner)

1.) Date of Survey:	Surveyor:	Monument:	Recording Information:		Monument Photograph:	
1975	D. Heaton & T. Harrell	Sandstone Found	Land Corner Record			
Reference Objects:	Species:	Diameter:	Bearing:	Distance:		
	Red Oak	7"	S18°W	12.0'		
	White Oak	18"	N 66° E	13.4'		
	CL Run	2.5' wide/course S	East	6.8'		
Evidence Found:	Found 9"x3" stone found 0.6" above grade with a "+" on top					
Monument Found:						
2.) Date of Survey:	Surveyor:	Monument:	Recording Information:			
1980	Tim Cummings	Sandstone Found	Land Corner Record			
Reference Objects:	Species:	Diameter:	Bearing:	Distance:		
	Red Oak	8"	S23°W	12.89'		
	White Oak	18"	N79°E	13.04'		
	Black Oak	22"	N01°W	15.75'		
Evidence Found:						
Monument Found:						

ACCESSORIES: Bearing and distance from monument to witness object.

Reference Objects:	Object or Tree Species:	Diameter:	Bearing:	Distance:
	Oak	28"	N 05° W	15.98'
	Oak	14"	S 71° W	11.88'
	White Oak	20"	N 62° E	13.01'
Monument Found or Set:	Found 9"x3" stone 0.6' above grade with a "+" on top			

MONUMENT SKETCH	NARRATIVE REFERENCE:
	The monument is 9"x3" stone found 0.6' above grade with a "+" on top, located ± 6' west of a small stream 1/4 up on a northerly facing slope.

SECTION DIAGRAM	PERPETUATION RECORD:
 Corner Location = ●	Monument was found undisturbed per a 1980 Land Corner Record. One existing bearing tree was remarked. Two new bearing trees were established.
Section: 16 & 17	Prepared By: BRG #7308 Date: 12/27/2012


approved by SRB 2-26-2013


LAND CORNER RECORD

Index: L9	Corner: 1/4 corner common to sections 16 & 17			<i>State of Indiana - Hoosier National Forest</i>	
Section: 16	Township: 7N	Range: 1E	P.M.: 2nd	County: Monroe	
Coordinate:	Lat./N:		Lon./E:		Datum:

CORNER HISTORY: (Chronological history of corner)					
1.) Date of Survey:	Surveyor:	Monument:	Recording Information:		Monument Photograph:
1975	D. Heaton & T. Harrell	Sandstone Found	Land Corner Record		
Reference Objects:	Species:	Diameter:	Bearing:	Distance:	
	Red Oak	7"	S18°W	12.0'	
	White Oak	18"	N 66° E	13.4'	
Evidence Found:	CL Run	2.5' wide/course S	East	6.8'	
	Found 9"x3" stone found 0.6" above grade with a "+" on top				
Monument Found:					
2.) Date of Survey:	Surveyor:	Monument:	Recording Information:		
1980	Tim Cummings	Sandstone Found	Land Corner Record		
Reference Objects:	Species:	Diameter:	Bearing:	Distance:	
	Red Oak	8"	S23°W	12.89'	
	White Oak	18"	N79°E	13.04'	
	Black Oak	22"	N01°W	15.75'	
Evidence Found:					
Monument Found:					

ACCESSORIES: Bearing and distance from monument to witness object.				
Reference Objects:	Object or Tree Species:	Diameter:	Bearing:	Distance:
	Oak	28"	N 05° W	15.98'
	Oak	14"	S 71° W	11.88'
	White Oak	20"	N 62° E	13.01'
Monument Found or Set:	Found 9"x3" stone 0.6' above grade with a "+" on top			

MONUMENT SKETCH	NARRATIVE REFERENCE:
	The monument is 9"x3" stone found 0.6' above grade with a "+" on top, located ± 6' west of a small stream 1/4 up on a northerly facing slope.

SECTION DIAGRAM	PERPETUATION RECORD:
 Corner Location = ●	Monument was found undisturbed per a 1980 Land Corner Record. One existing bearing tree was remarked. Two new bearing trees were established.
Section: 16 & 17	Prepared By: BRG #7308 Date: 12/27/2012

MONUMENT RECORD

Corner I.D. #

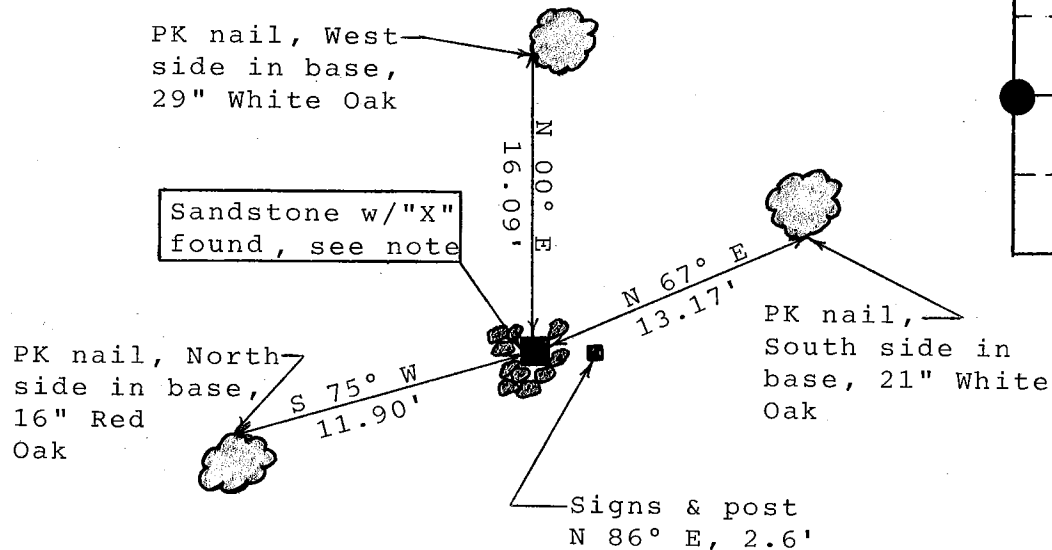
I - 11

STATE OF INDIANA - COUNTY OF MONROE

Section Sixteen (16), Township 7 North, Range 1 East

Monument Description & Remarks: Found Sandstone w/chisled "X" at West 1/4
corner of section. Stone was found loose in ground in cairn of rocks.
Stone was firmed up and cairn of rocks replaced. Stone was marked with a

Recovery Tie Drawing



Note: Stone is 0.7' x 0.3' x 1.0' out of ground.

Description continued: U.S. Forestry 3" x 3" red wood post & sign (typical). Sign read "Land Survey Monument". County **Not To Scale** survey marker sign nailed on Forestry sign post (N 86° E, 2.6').

State of Indiana

County of Monroe

Space
Reserved For
Recording
Officer

I, Michael W. Friley, County Surveyor, hereby certify
that this document was prepared under my direction in
accordance with the provisions of Section 17-3-64-4
through 17-3-64-8 of the Indiana Code, being Acts of 1965,
Chapter 319; and the above data is given under my hand and
seal this 14th day of February, 1996 A.D.

Indiana Registered Land Surveyor No. _____ or

Monroe County Surveyor's Office
United States Government Agency

Monroe County Surveyor
Title

Field Book:

96-01


Page:

19

T. 7N R. 1E Mer. N.F. Hoosier County Monroe State IN
14 Corner common to sections 16 17 and

EXISTING SURVEYS

Original Government Survey		Original Evidence Found	
Year surveyed <u>1814</u>	Original monument <u>Wood Post</u> (Wood post, stone, pile of stones, pipe, etc.)	Year of search <u>1980</u> By <u>Tim Cummings</u>	Monument found <u>None</u>
Bearing Trees		Original Bearing Trees Found	
Species <u>Dogwood</u>	Species <u>Gum</u>	Species	
Diameter <u>4"</u>	Diameter <u>20"</u>	Diameter	
Bearing <u>N77°W</u>	Bearing <u>S31E</u>	Bearing	
Distance <u>341ks</u>	Distance <u>101ks</u>	Distance	
Subsequent Corner Restoration		Evidence of Subsequent Corner Restoration Found	
Year surveyed <u>1861</u> By <u>E. Busck</u>	Where filed or recorded <u>Mon. Co. Eng. Off.</u>	Year of search <u>1980</u> By <u>Tim Cummings</u>	<u>Sandstone 14" x 9" x 3" w/4</u>
Monument <u>Sandstone</u> (Original, concrete post, iron rod, etc.)			
Bearing Trees, Reference Objects			
Species <u>Beech</u>	Species <u>Beech</u>		
Diameter <u>10"</u>	Diameter <u>18"</u>		
Bearing <u>S82°E</u>	Bearing <u>N1°E</u>		
Distance <u>91ks</u>	Distance <u>301ks</u>		



Sketch

○ Corner ■ F.S. Land

Relation of Evidence to Record Features Along Section Lines

Section line to sections _____
Object _____
Record distance _____
Measured distance _____

Other Evidence

Describe evidence of use and occupation such as roads, fences, clearings, timber cutting lines, plantations, etc. Cite source of testimony if any. Tree line running E. Sedge brush field to S.E. app 50' Located 6' W. of drainage

At time of search:

1. Did you have the record description?

Yes ✓ No _____

2. How was search area located?

Pacing, chaining, photos, maps, etc. _____

3. Man hours spent in search 5 min.

4. Do you think additional search might recover evidence? Yes _____ No _____

5. Signature Tim Cummings

Perpetuation Record

Monument and accessories established. Include brief description of area.

B.T.
Cor. Tag
W.O.
18"
N79°E
13.04'B.T.
Cor. Tag
B.O.
22"
N10°W
15.75'B.T.
Cor. Tag
R.O.
8"
S23°W
12.89'

Certified corner restoration certificate prepared:

Yes _____ No _____

Filed in county records at _____

Date _____

County Document No. _____

Identified on aerial photo No. _____

Which is filed at _____

T. 7N R. 1E 2nd Mer. N.F. Hoosier County Monroe State IND.
14 Section Corner common to sections 16 17 and

EXISTING SURVEYS

Original Government Survey		Original Evidence Found	
Year surveyed <u>1814</u>		Year of search _____	By _____
Original monument <u>Wood Post</u> (Wood post, stone, pile of stones, pipe, etc.)		Monument found _____	
Bearing Trees		Original Bearing Trees Found	
Species <u>Dogwood</u> <u>Gum</u>		Species _____	
Diameter <u>4"</u> <u>20"</u>		Diameter _____	
Bearing <u>N 77° W</u> <u>S 31° E</u>		Bearing _____	
Distance <u>34 lks</u> <u>10 lks</u>		Distance _____	
Subsequent Corner Restoration		Evidence of Subsequent Corner Restoration Found	
Year surveyed <u>1861</u> By <u>E. BUSKIRK</u>		Year of search <u>1975</u> By <u>H Deaton T Harrell</u>	
Where filed or recorded <u>Mon Co ENG. OFFICE</u>		<u>Found sandstone 3"x4" 18" above</u>	
Monument <u>(Original, concrete post, iron rod, etc.)</u>		<u>grade marked + on top</u>	
		<u>stone at NW corner of field in edge of</u>	
		<u>timber. W. bank of drainage</u>	
Bearing Trees, Reference Objects		Bearing Trees, Reference Objects	
Species <u>Beech</u> <u>Beech</u>		<u>None</u>	
Diameter <u>10</u> <u>12"</u>			
Bearing <u>S 82° E</u> <u>N 10° E</u>			
Distance <u>9 lks</u> <u>30 lks</u>			


Relation of Evidence to Record Features Along Section Lines

Section line to sections _____
Object _____
Record distance _____
Measured distance _____

Other Evidence

Describe evidence of use and occupation such as roads, fences, clearings, timber cutting lines, plantations, etc.. Cite source of testimony if any. 4:15

Stone is loosely set, leans to South



Sketch

○ Corner ■ F.S. Land

At time of search:

1. Did you have the record description?

Yes ☒ No _____

2. How was search area located?

Pacing, chaining, photos, maps,
etc. _____3. Man hours spent in search 14. Do you think additional search might
recover evidence? Yes _____ No ☒

5. Signature _____

Perpetuation Record

Monument and accessories established. Include brief description of area.

<u>Car. Tag</u>	<u>BT Tag</u>	<u>E of</u>
<u>Red Oak</u>	<u>W. Oak</u>	<u>Run</u>
<u>7"</u>	<u>18"</u>	<u>25' wide course South</u>
<u>S 18° W</u>	<u>N 66° E</u>	<u>East</u>
<u>12.0 Ft</u>	<u>13.4 Ft</u>	<u>6, 8</u>

Certified corner restoration certificate prepared: Yes _____ No _____

Filed in county records at _____ Date _____ County Document No. _____

Identified on aerial photo No. _____ Which is filed at _____